

REQUEST FOR PROPOSALS

RE-SURFACING VARIOUS PARKING LOTS FOR THE DALE COUNTY BOARD OF EDUCATION OZARK, ALABAMA

The sealed proposal as described above shall be received by Mr. Ben Baker, Superintendent, at The Dale County Board of Education, 202 S. HWY 123 Suite E, Ozark, AL 36360 **until 2:00 PM, Thursday, May 6, 2021.**

Proposal "A": Front Parking & Drive @ Newton – Asphalt Overlay
Proposal "B": South Dale MS Rear Access Drive – Asphalt Overlay

All Contractors pricing this project shall be required to visit the site and examine all existing conditions prior to submitting their proposal. All Contractors pricing this project shall have general liability and workman's compensation insurance.

The projects shall be priced excluding taxes. Proposals must be submitted on Contractors letterhead. No proposal may be withdrawn after scheduled closing for receipt of proposals for a period of sixty (60) days. The Owner reserves the right to reject any or all proposals and to waive technical errors if, in the Owners judgment, the best interests of the Owner will thereby be promoted.

A certified check or Bid Bond payable to Dale County Board of Education in an amount not less than five percent (5%) of the amount of the proposed amount, but in no event more than \$10,000.00 must accompany the Contractor's proposal. Performance and statutory labor and material payment bonds will be required at the signing of the Contract.

All Contractors bidding in amounts exceeding that established by the State Licensing Board for General Contractors must be licensed under the provisions of Title 34, Chapter 8, Code of Alabama, 1975, and must show evidence of license before bidding or bid will not be received or considered by the Owner. All Contractors shall show such evidence by clearly displaying current license number on the outside of sealed envelope in which the proposal is delivered.

All RFI's (Request for Information) regarding the proposal scope shall be sent and addressed thru the following e-mail account: cwalker@dalecountyboe.org

Completion Time: This project shall be **completed in (30) calendar days from Notice to Proceed from the Owner.**

Supervision: Contractor to provide Superintendent(s) to ensure proper supervision for all work.

Owner:

Mr. Ben Baker, Superintendent
The Dale County Board of Education
202 S. HWY 123, Suite E
Ozark, AL 36360
Phone:334-774-2355

SPECIFICATION - ASPHALTIC CONCRETE PAVING

PART 1 - GENERAL

RELATED DOCUMENTS:

Drawings and general provisions of the contract, including General and Supplementary Conditions and Division 1 Specification Sections apply to work of this section.

DESCRIPTION OF WORK:

Provide power brooming of all areas to receive new asphalt overlay
Removed defective or compromised existing paving and/or base material and provide asphaltic paving patch
Install 1 ½" overlay of asphalt wearing course – ALDOT 429A
Provide stripping as required
Repair damaged to existing improvements caused during this project
Remove all construction materials and debris upon completion

QUALITY ASSURANCE:

Referenced Standards: Where the term "Referenced Standard" is used in these Project Specifications, it shall be interpreted as **referring to the current edition of "Standard Specifications for Highway Construction, 2018" or latest edition for Alabama Department of Transportation "**. Referenced Divisions of the "Standard" are hereby made a part of this Project Specification insofar as they may be termed applicable. In no case will requirements for "Method of Measurement" and "Basis of Payment" be considered as applicable to this Project Specification.

TESTING AND INSPECTION:

Testing and Inspection Service: The **Owner** will select a firm to provide testing and inspection service, to include testing soil materials proposed for use in work and provide field facilities for quality control testing during paving operations and shall pay cost for testing. Spot checking of the depths of the compacted base prior to paving shall be done to verify that materials meet the minimum required thickness. Temperature and thickness of paving will be periodically monitored during the paving operation.

SUBMITTALS:

Material Certificates: Provide copies of materials certificates signed by material producer and Contractor, certifying that each material item complies with, or exceeds, specified requirements.

JOB CONDITIONS:

Weather Limitations: Apply prime and tack coats when ambient temperature is above 50 degrees Fahrenheit and when temperature has not been below 35 degrees Fahrenheit for 12 hours immediately prior to application. Do not apply when base is wet or contains an excess of moisture.

Construct asphalt concrete surface course when atmospheric temperature is above 40 degrees Fahrenheit and when base is dry. Base course may be placed when air temperature is above 30 degrees Fahrenheit and rising.

Grade Control: Establish and maintain required lines and elevations.

\

PART 2 - PRODUCTS

MATERIALS:

Herbicide Treatment: Commercial chemical for weed control, registered by Environmental Protection Agency. Provide granular, liquid, or wettable powder form.

Manufacturer: Subject to compliance with requirements, provide products of one of the following:

1. Allied Chemical Corporation
2. Achem Products, Inc.
3. Ciba-Geigy Corporation
4. Dow Chemical U.S.A.
5. E.I. DuPont De Nemours and Company, Inc.
6. FMC Corporation
7. Thompson-Hayward Chemical Company
8. U. S. Borax and Chemical Company

PART 3 - EXECUTION

SURFACE PREPARATION:

General:

Notify Owner of unsatisfactory conditions other than areas stated to be patched above. Do not begin paving work until deficient subgrade areas have been corrected and are ready to receive paving.

Herbicide Treatment: Apply chemical weed control agent in strict compliance with manufacturer's recommended dosages and application instructions. Apply to compacted, dry sub grade.

1. Allow to dry until at proper condition to receive paving.

PLACING MIX:

General: Place asphalt concrete mixture on prepared surface, spread and strike-off. Spread mixture at minimum temperature of 225 degrees Fahrenheit. Place inaccessible and small areas by hand. Place each course to required grade, cross-section and compact thickness.

Paver Placing: Place in strips not less than 10' wide, unless otherwise acceptable to Owner. After first strip has been placed and rolled, place succeeding strips and extend rolling to overlap previous strips.

Joints: Make joints between old and new pavements, or between successive days' work, to ensure continuous bond between adjoining work. Construct joints to have same texture, density and smoothness as other sections of asphalt concrete course. Clean contact surfaces and apply tack coat.

ROLLING:

General: Begin rolling when mixture will bear roller weight without excessive displacement.

Compact mixture with hot hand tampers or vibrating plate compactors in areas inaccessible to rollers.

Breakdown Rolling: Accomplish breakdown or initial rolling immediately following rolling of joints and outside edge. Check surface after breakdown rolling, and repair displaced areas by loosening and filling, if required, with hot material.

Second Rolling: Follow breakdown rolling as soon as possible warm enough for removal of roller marks. Continue rolling until roller marks are eliminated and course has attained maximum density.

Patching: Remove and replace paving areas mixed with foreign materials and defective areas. Cut-out such areas and fill with fresh, hot asphalt concrete. Compact by rolling to maximum surface density and smoothness.

Protection: After final rolling, do not permit vehicular traffic on pavement until it has cooled and hardened. Erect barricades to protect paving from traffic until mixture has cooled enough not to become marked.

TRAFFIC AND LANE MARKINGS:

Cleaning: Sweep and clean surface to eliminate loose material and dust.

Lane / Parking Marking Paint: Paint Stripes shall be equal to KRYLON INDUSTRIAL LINE-UP PAINT SB Pavement Striping Paint for Parking Lots - Solvent-Based Pavement Striping alkyd paint or equal. Color: White at typical spaces, Blue at handicapped spaces and symbol.

Apply paint with mechanical equipment to produce uniform straight edges. Apply in 2 coats at manufacturer's recommended rates.

FIELD QUALITY CONTROL:

General: Test in-place asphalt concrete courses for compliance with requirements for thickness and surface smoothness. Repair or remove and replace unacceptable paving as directed by Owner.

Thickness: In-place compacted thickness will not be acceptable if exceeding 1/4" from required thickness.

Surface Smoothness: Test finished surface of each asphalt concrete course for smoothness, using 10' straight-edge applied parallel with, and at right angles to centerline of paved area. Surfaces will not be acceptable if exceeding the following tolerances for smoothness.


1. Base Course Surface: 1/4".
2. Wearing Course Surface: 3/16"


Check surface areas at intervals as directed by Owner.

TESTING:

1. To be performed by independent lab paid by Owner, approved by Owner.
2. Before delivery Bituminous Binder and Wearing Course Materials shall be tested by Lab at Suppliers production plant.
3. Testing shall verify that all samples meet ALDOT specifications.
4. Test reports sent to Owner, Contractor.

END OF SECTION

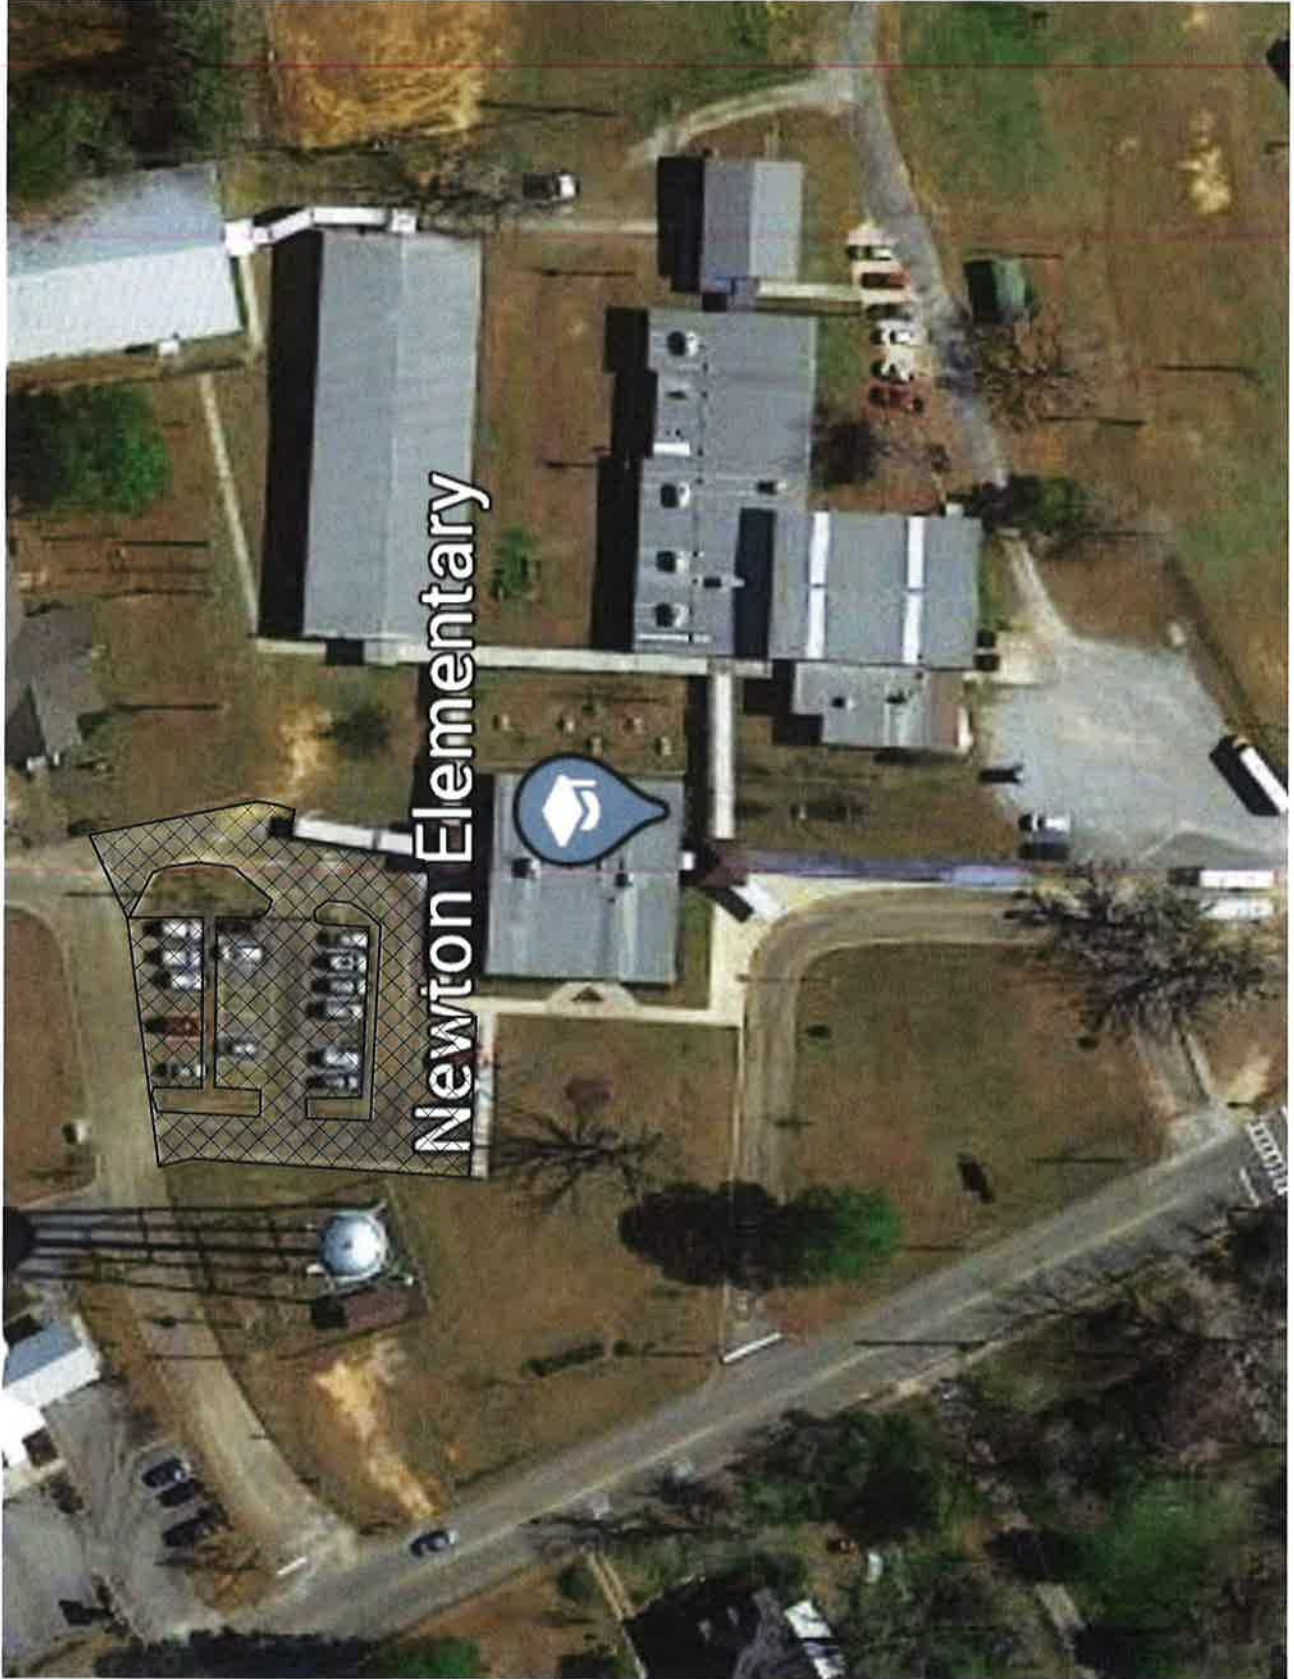

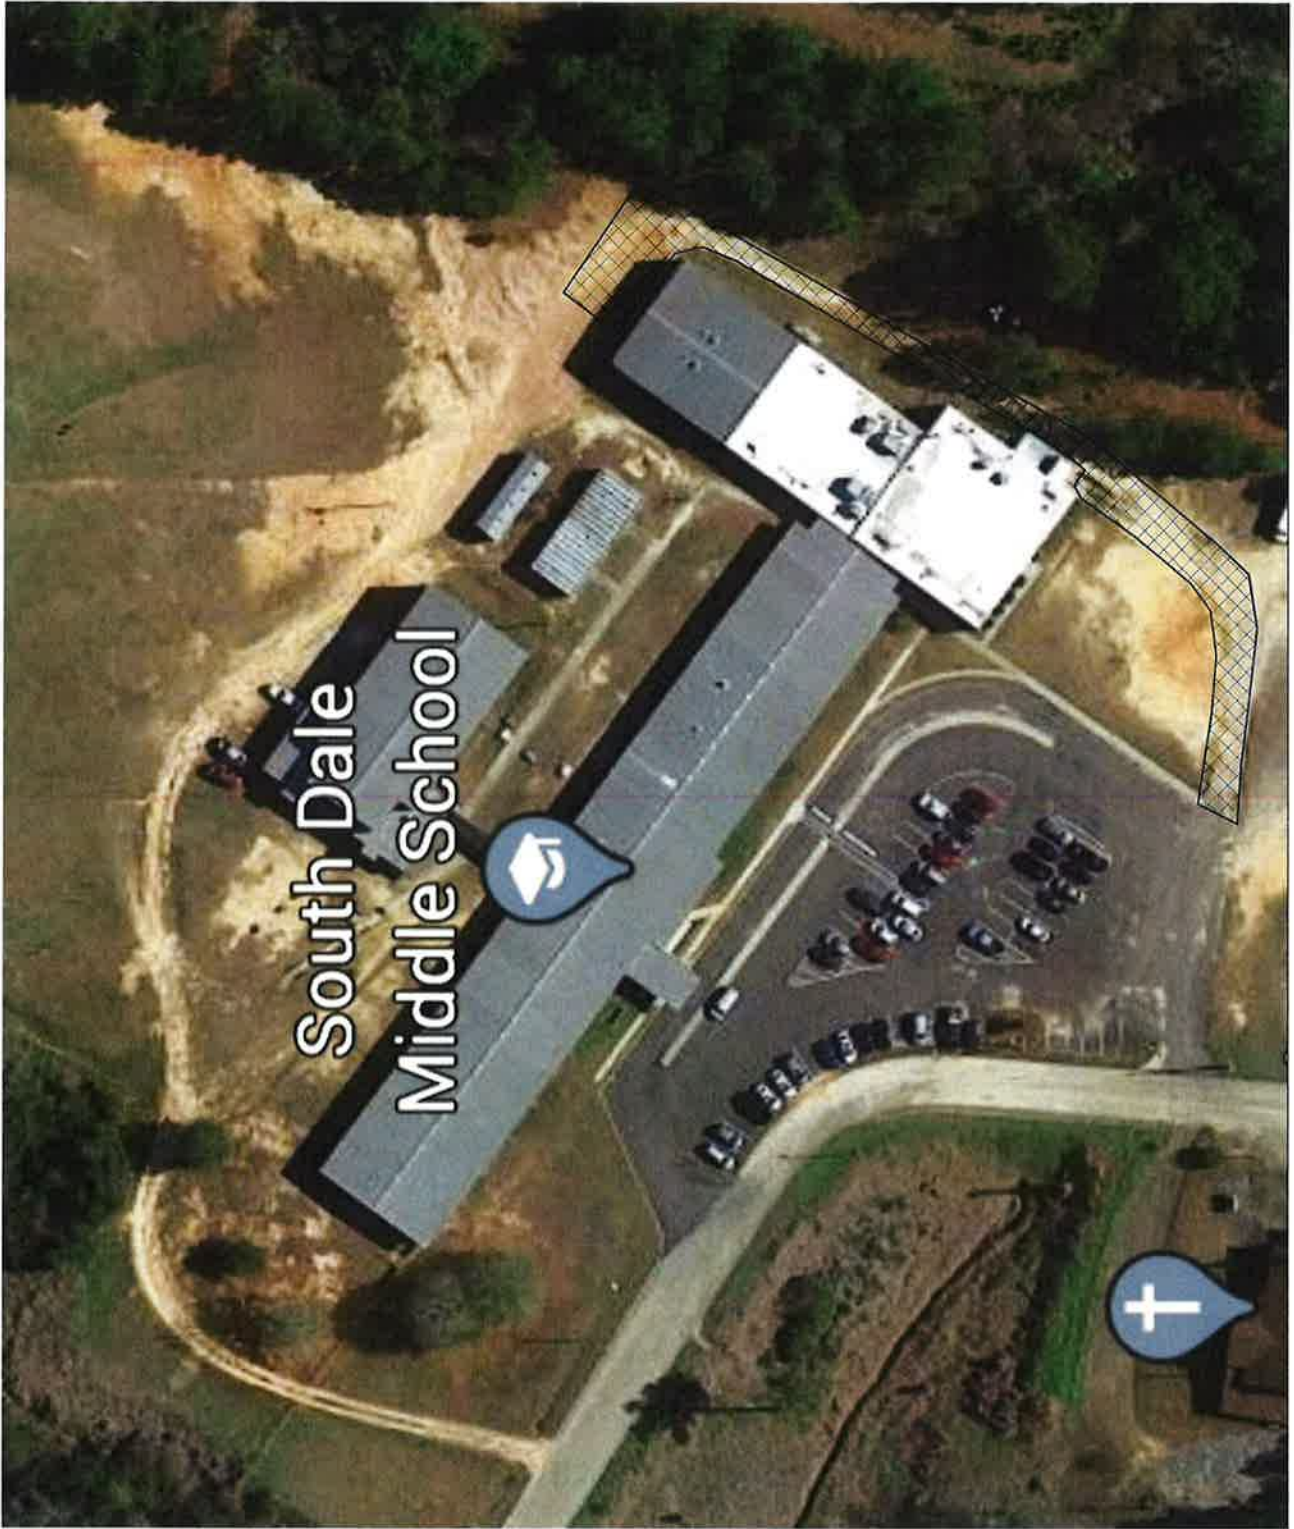

South Dale
Middle School



PROPOSAL FORM

ABC Form C-3
August 2001

To: _____ Date: _____
(Awarding Authority)

In compliance with your Advertisement for Bids and subject to all the conditions thereof, the undersigned

(Legal Name of Bidder)

hereby proposes to furnish all labor and materials and perform all work required for the construction of
WORK _____

in accordance with Drawings and Specifications, dated _____, prepared by
_____, Owner.

The Bidder, which is organized and existing under the laws of the State of _____,
having its principal offices in the City of _____,
is: a Corporation a Partnership an individual (other) _____.

LISTING OF PARTNERS OR OFFICERS: If Bidder is a Partnership, list all partners and their addresses; if Bidder is a Corporation, list the names, titles, and business addresses of its officers:

BIDDER'S REPRESENTATION: The Bidder declares that it has examined the site of the Work, having become fully informed regarding all pertinent conditions, and that it has examined the Drawings and Specifications (including all Addenda received) for the Work and the other Bid and Contract Documents relative thereto, and that it has satisfied itself relative to the Work to be performed.

ADDENDA: The Bidder acknowledges receipt of Addenda Nos. _____ through _____ inclusively.

BASE BID: For construction complete as shown and specified (**Including Unit Prices below**), the sum of:

_____ Dollars (\$ _____)

ALTERNATES: If alternates as set forth in the Bid Documents are accepted, the following adjustments are to be made to the Base Bid:

- For Alternate No. 1 (.....) (add)(deduct) \$ _____
(Insert key word for Alternate)
- For Alternate No. 2 (.....) (add)(deduct) \$ _____
- For Alternate No. 3 (.....) (add)(deduct) \$ _____
- For Alternate No. 4 (.....) (add)(deduct) \$ _____
- For Alternate No. 5 (.....) (add)(deduct) \$ _____
- For Alternate No. 6 (.....) (add)(deduct) \$ _____

UNIT PRICES- (See Attachment)

BID SECURITY: The undersigned agrees to enter into a Construction Contract and furnish the prescribed Performance and Payment Bonds and evidence of insurance within fifteen calendar days, or such other period stated in the Bid Documents, after the contract forms have been presented for signature, provided such presentation is made within 30 calendar days after the opening of bids, or such other period stated in the Bid Documents. As security for this condition, the undersigned further agrees that the funds represented by the Bid Bond (or cashier's check) attached hereto may be called and paid into the account of the Awarding Authority as liquidated damages for failure to so comply.

Attached hereto is a: *(Mark the appropriate box and provide the applicable information.)*

- Bid Bond, executed by _____ as Surety,
 - a cashier's check on the _____ Bank of _____,
- for the sum of _____ Dollars
 (\$ _____) made payable to the Awarding Authority.

BIDDER'S ALABAMA LICENSE:

State License for General Contracting: _____
License Number Bid Limit Type(s) of Work

CERTIFICATIONS: The undersigned certifies that he or she is authorized to execute contracts on behalf of the Bidder as legally named, that this proposal is submitted in good faith without fraud or collusion with any other bidder, that the information indicated in this document is true and complete, and that the bid is made in full accord with State law. Notice of acceptance may be sent to the undersigned at the address set forth below.

The Bidder also declares that a list of all proposed major subcontractors and suppliers will be submitted at a time subsequent to the receipt of bids as established by the Architect in the Bid Documents but in no event shall this time exceed twenty-four (24) hours after receipt of bids.

Legal Name of Bidder _____

Mailing Address _____

*** By (Legal Signature)** _____

*** Name (type or print)** _____ (Seal)

*** Title** _____

Telephone Number _____

* If other than the individual proprietor, or an above named member of the Partnership, or the above named president, vice-president, or secretary of the Corporation, attach written authority to bind the Bidder. Any modification to a bid shall be over the initials of the person signing the bid, or of an authorized representative.